



## PositiV Technical Specifications

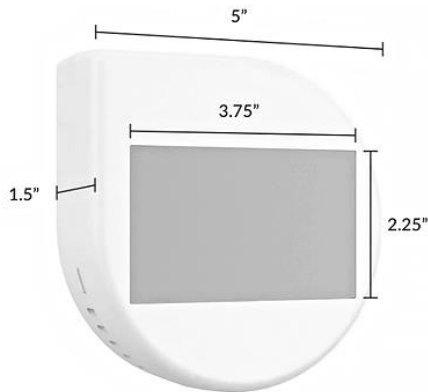

PositiV Indoor Unit

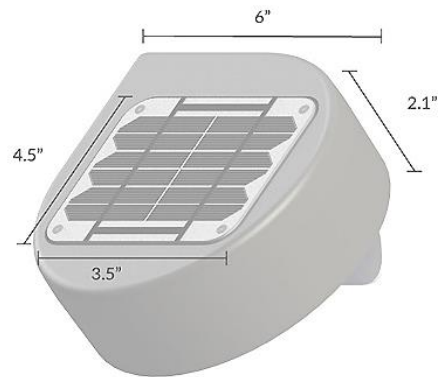

PositiV Outdoor Unit

**PositiV Indoor Unit Weight:** 0.38 lb.

**PositiV Outdoor Unit Weight:** 1.18 lb.

**PositiV Indoor Unit Power & Lighting Requirements:** 400 lux for 12 hours per day

**PositiV Indoor Unit Operating Temperature:** 0 °C – +50 °C

**PositiV Outdoor Unit Operating Temperature:** -40 °C – +80 °C

**Wireless Communication:** FCC ID's: S9NSPBTLERF, MCQ-XBEE3, MCQ-XB3C1, RI7XE866A1NA

**Sustainability:** Shipping packaging is 100% recyclable and certified by the Sustainable Forestry Initiative.

**Support & Limited Warranty:** Visit <https://melinkcorp.com/terms> for related terms and conditions.

## In the Box

- 1 Indoor PositiV Unit
- 1 Outdoor PositiV Unit
- 1 Pipe Clamp
- 2 Sheet Metal Screws
- 2 Masonry / Concrete Screws (5/32" bit will be needed for pilot holes)
- 2 Dry Wall Screws
- 1 Welcome Card

## Suggested Tools

- 1 Philips Head Screwdriver
- 1 Android or Apple Device
- 1 5/16" Crescent Wrench (If mounting the outdoor unit using the attached bracket)